



# ICEU46 - SELF CONTAINED MACHINE WITH PUMP OUT DRAIN



ICEU46

## Features and Benefits

- WITH PUMPOUT DRAIN
- Maximum drain height 1 metre.
- Maximum drain length 4 metres.
- 2 metres of drain hose included in installation kit.
- Produces clear, long-lasting shot-style cubes.
- Space-saving 390 mm wide undercounter design.
- Produces up to 20.5 kg of ice per day.
- Built-in storage bin stores up to 8 kg.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- Ideal for any undercounter or bar application.
- Contemporary, elegant design.

## Options & Accessories

WATER FILTERS		
Ice Machine Model	Manifold	
	System	Replacement
ICEU46AS	CD10	CD100P

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Two years Parts
- Two years Labor

## Ice Form



### BISTROT CUBE

SHOT STYLE	
Height (mm)	30.5
Diameter (mm)	29.5

ICEU46 SELF CONTAINED MACHINE WITH PUMP OUT DRAIN






# ICEU46 - SELF CONTAINED MACHINE WITH PUMP OUT DRAIN



ICEU46 SELF CONTAINED MACHINE WITH PUMP OUT DRAIN

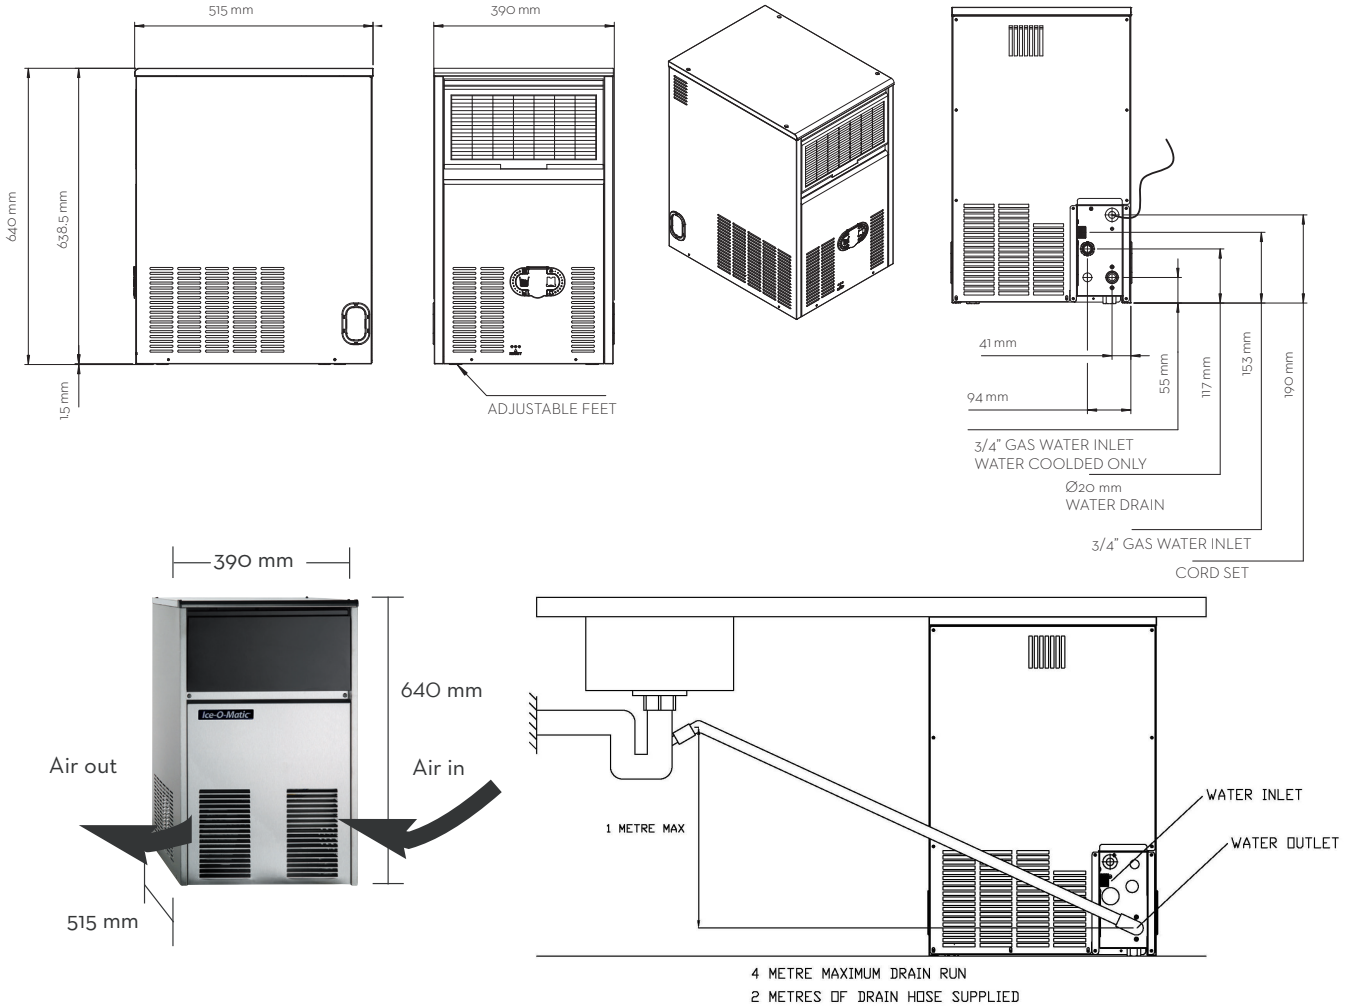

## Operating Requirements

	MINIMUM	MAXIMUM
	<b>50 Hz</b>	
Ambient Temp. Range Air	10°C	43°C
Water Temp.	5°C	38°C
Water Pressure	0.8 BAR	5 BAR
Electrical Voltage	230V/50Hz/1ph	

## Dimensions

ALL MODELS	
W x D x H (mm)	390 x 515 x 640

## Specifications

Model Number	Cond. Unit	Ice Production per 24 hrs 21°C air/ 10°C water (kg)	Storage Capacity (kg)	Water Consumption (LT/60 mins)	Electric Consumption (kWH/24hr)	Voltage Characteristics
ICEU46AS	Air	20.5	8	3.3	6.9	230/50/1

NOTES:  
 Approx. Shipping Weight kg: 36  
 Refrigerant Type: R134a  
 All specifications and performance data are subject to normal manufacturing variances.