



# ICEU66 - SELF CONTAINED MACHINE WITH PUMP OUT DRAIN



ICEU66

## Features and Benefits

- WITH PUMP OUT DRAIN
- Maximum drain height 1 metre.
- Maximum drain length 4 metres.
- 2 metres of drain hose included in installation kit.
- Produces clear, long-lasting shot-style cubes.
- Space-saving 467 mm wide undercounter design.
- Produces up to 27 kg of ice per day.
- Built-in storage bin stores up to 15 kg.
- Constructed from sturdy, corrosion-resistant stainless steel and fingerprint-proof plastic.
- Ideal for any undercounter or bar application.
- Contemporary, elegant design.

## Options & Accessories

WATER FILTERS		
Ice Machine Model	Manifold	
	System	Replacement
ICEU66AS	CD10	CD100P

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Two years Parts
- Two years Labor

## Ice Form



## BISTROT CUBE

SHOT STYLE	
Height (mm)	30.5
Diameter (mm)	29.5

ICEU66 SELF CONTAINED MACHINE WITH PUMP OUT DRAIN






# ICEU66 - SELF CONTAINED MACHINE WITH PUMP OUT DRAIN



ICEU66 SELF CONTAINED MACHINE WITH PUMP OUT DRAIN

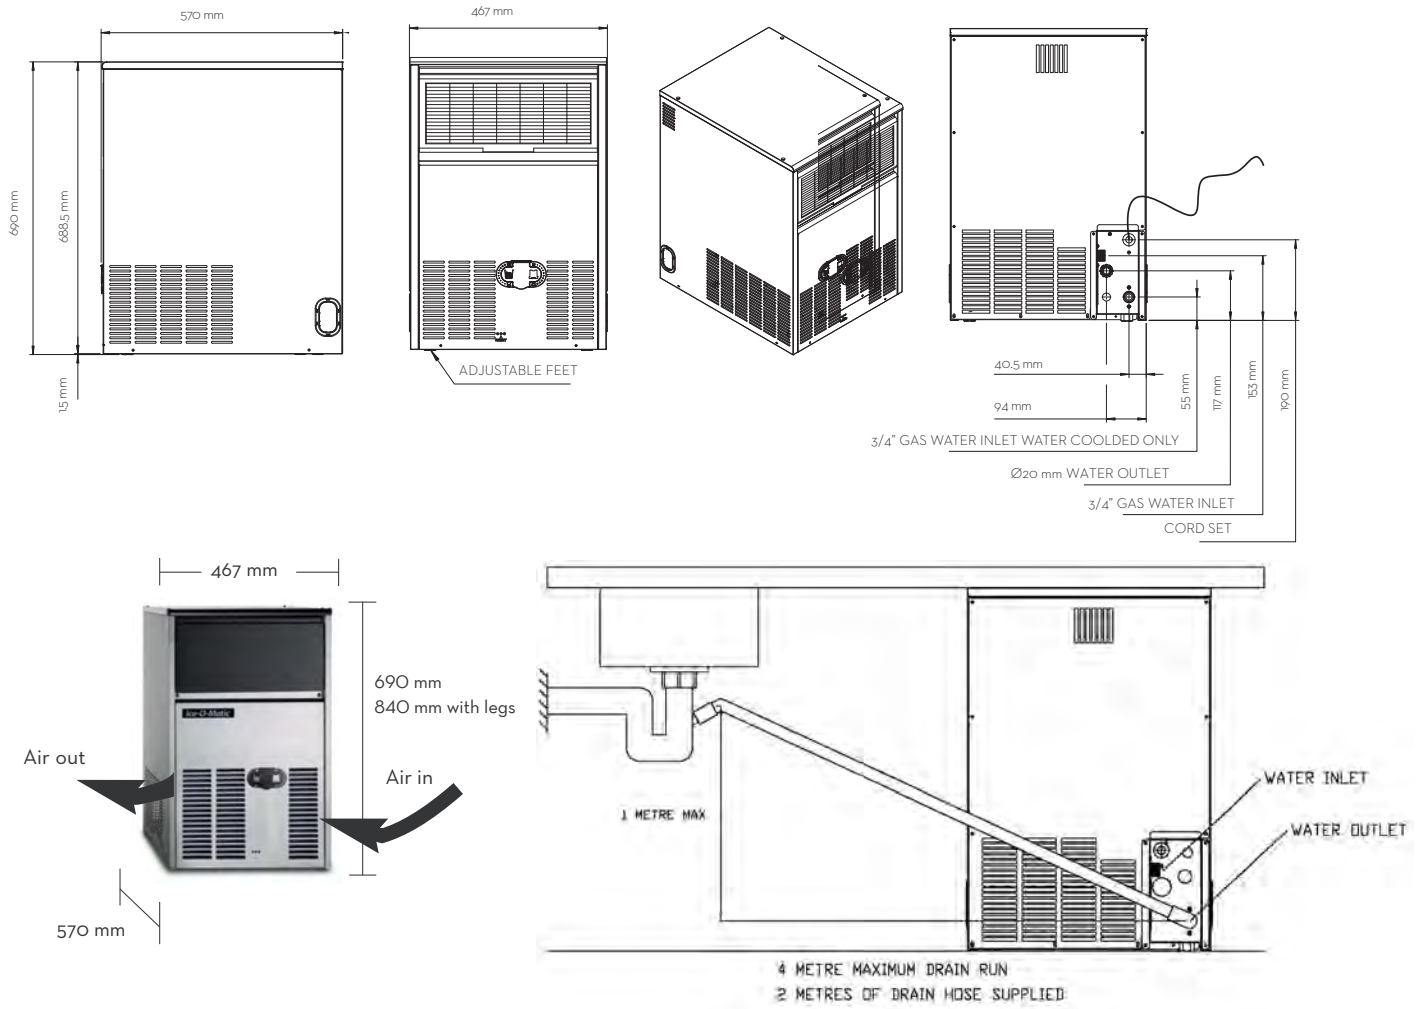

## Operating Requirements

	MINIMUM	MAXIMUM
1.5 mm (1/16")	<b>50 Hz</b>	
Ambient Temp. Range Air	10°C	43°C
Water Temp.	5°C	38°C
Water Pressure	0.8 BAR	5 BAR
Electrical Voltage	230V/50Hz/1ph	

## Dimensions

with legs	W x D x H (mm)	467 x 570 x 840
-----------	----------------	-----------------

## Specifications

Model Number	Cond. Unit	Ice Production per 24 hrs 21°C air/ 10°C water (kg)	Storage Capacity (kg)	Water Consumption (Lt/60 mins)	Electric Consumption (kWh/24hr)	Voltage Characteristics
ICEU66AS	Air	27	15	3,8	7,3	230/50/1

NOTES:  
 Approx. Shipping Weight kg: 40  
 Refrigerant Type: R134A  
 All specifications and performance data are subject to normal manufacturing variances.