



ELEVATION SERIES CUBE ICE MAKER CIM1125



Model:
□ CIM1125



CIM1125 ON B42

Features and Benefits

- 22.25" (565 mm) wide space-saving design.
- Produces up to 425 kg of ice per day.
- *Energy and Environment*
 - Exceeds new 2018 DOE (Department of Energy) regulations.
 - Up to 20% more energy efficient than other models.
 - Environmentally friendly, including BPA-free plastic and recyclable parts.
- *Sanitation*
 - Plastic Food Zone eliminates hard-to-clean nooks and crannies, allowing for effortless wipe down and easy, long-lasting sanitation.
 - Built in Agion® ensures unbeatable antimicrobial protection.
 - Smart LED light indicates machine status and when cleaning is required.
 - Simple, one-touch controls for sanitization and descaling.
 - BPA-free snap-in, snap-out dishwasher-safe components.
- *Universal Smart Harness™* control board simplifies installation and servicing with better access, digital diagnostics, universal components and common configuration.

CIM1125 CUBE ICE MAKER

Ice Form

FULL CUBE DIMENSIONS	
W x D x H (mm)	22 x 22 x 22
HALF CUBE DIMENSIONS	
W x D x H (mm)	10 x 22 x 22



CUBE

Bin Chart *Kits for Combining Wider Bins with Smaller Models*

ICE STORAGE BINS							
Model No. Capacity Width	B25 110 kg 762 mm	B40 156 kg 762 mm	B42 160 kg 559 mm	B55 232 kg 762 mm	CIB230 232 kg 770 mm	B110 388 kg 1,219 mm	CIB400 400 kg 1,220 mm
Kits CIM1125	BT55		Kit Not Required	BT55	BT55	N/A	N/A

*See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

Options & Accessories

WATER FILTERS		
Ice Machine Model	Manifold	
	System	Replacement
CIM1125	CD10	CD100P

Note: All modular cube CIM units can be installed with manufacturer approved ozone delivery systems.

Ice Maker Warranty

COMMERCIAL WARRANTY	
Ice Maker	3 YEARS parts and labor
Evaporator and Compressor	5 YEARS parts






ELEVATION SERIES CUBE ICE MAKER CIM1125



CIM1125 CUBE ICE MAKER

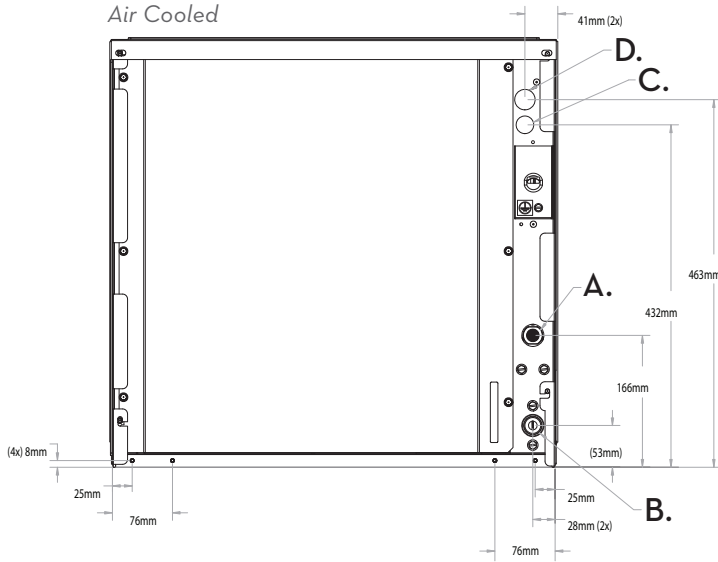


Air Cooled

Please note: air-cooled units require 152 mm clearance for air intake and exhaust.

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Electrical connection junction box, 7/8".

Dual Exhaust for Installation Flexibility



Operating Requirements

	MINIMUM	MAXIMUM
		50Hz
Ambient Temp. Range Air	10 °C	43 °C
Water Temp.	4.4 °C	
Water Pressure	1.4 BAR	5.5 BAR

Dimensions

ALL MODELS	
W x D x H (mm)	565 x 616 x 683

Specifications

Model Number	Cond. Unit	Half-Cube Ice Production per 24hrs		Water Usage litres per 45 kg of Ice 32°C air/21°C water		kWH Used per 45 kg of ice @ 32°C air/ 21°C water	Voltage Characteristics	Min. Circuit Ampacity	Fuse Size	Refrigeration Capacity per hour
		21°C air/ 10°C water kg	32°C air/ 21°C water kg	Potable	Condenser					
CIM1125A	Air	425	374	68	N/A	5.2	220-240/50/1	13.5	20	5.657

* Daily ice production based on half cube configuration. When installing a CIM on a drink dispenser, the **KCUBEDISPB** MUST be used.

Notes:
 Number of Wires: 3 (including ground)
 Approx. Shipping Weight lbs (kg): CIM1125A 105
 Refrigerant Type: R404A